

Complete Units

Model 7053 H



Safety and features

- Window unit with sliding Model 53 H pass-through for pedestrians, fits flush with outside façade.
- Front panel for handing over passes, files and bigger items up to A4 in size and 120 mm high.
- with integrated intercom for automatic two-way conversation.
- Drawer locks automatically in both end-positions.
- Offers firearms protection, capable of withstanding heavy handgun fire in accordance with FB4.
- Model 7053 H fulfils German UVV regulations.

Materials and use

- Safety glass adhering to C3 SF or BR4N S
- Frame made of 2 mm brushed stainless steel.
- Cover panel made of 1 mm brushed stainless steel, cover made of 2 mm brushed stainless steel.
- All metal parts have been produced using state-of-the-art precision laser cutting technology for ultimate quality.
- Model 7053 H is suitable for use in outdoor areas.
- The unit requires no maintenance. No need for cleaning or lubrication.

Use

Model 7053 H is a complete window counter and transfer unit, with a Model 53.01 H pass-through for use in indoor and outdoor areas that comes ready for installation. It is ideal for indoor use as a sales or reception counter for places such as front-desk receptions, gatehouses or for handing over passes, receipts, firearms and similar items in areas requiring a high level of firearms protection.

Complete Units

Outer dimensions (all measurements in mm)

Width	1000/1010
Height	1275/1285
Depth	590

Drawer clearance

Width	330
Depth	348
Height	120

Mounting, wall recess

970 x 1200 (W x H)

Weight

230 kg


Miscellaneous

- Available in higher firearms protection classes, eg: FB6 or FB7
- Available with fire protection up to F90
- Also available with window shutters and illumination
- Special sizes available on request
- Frame coatings available in alternative RAL colours on request

Modell 7053 H

Installation and dimensions

The window unit comes complete with power cables and is ready for exact mounting in prepared wall sections. It is inserted into the recess from the outside to fit flush with the wall. This is done by removing the inner frame before screwing the unit into place from the inside to prevent tampering. Consideration must be given to access requirements and the possible need to remove the unit later in the unlikely event of repairs. There should be a 230 V socket near the counter on the inner side.

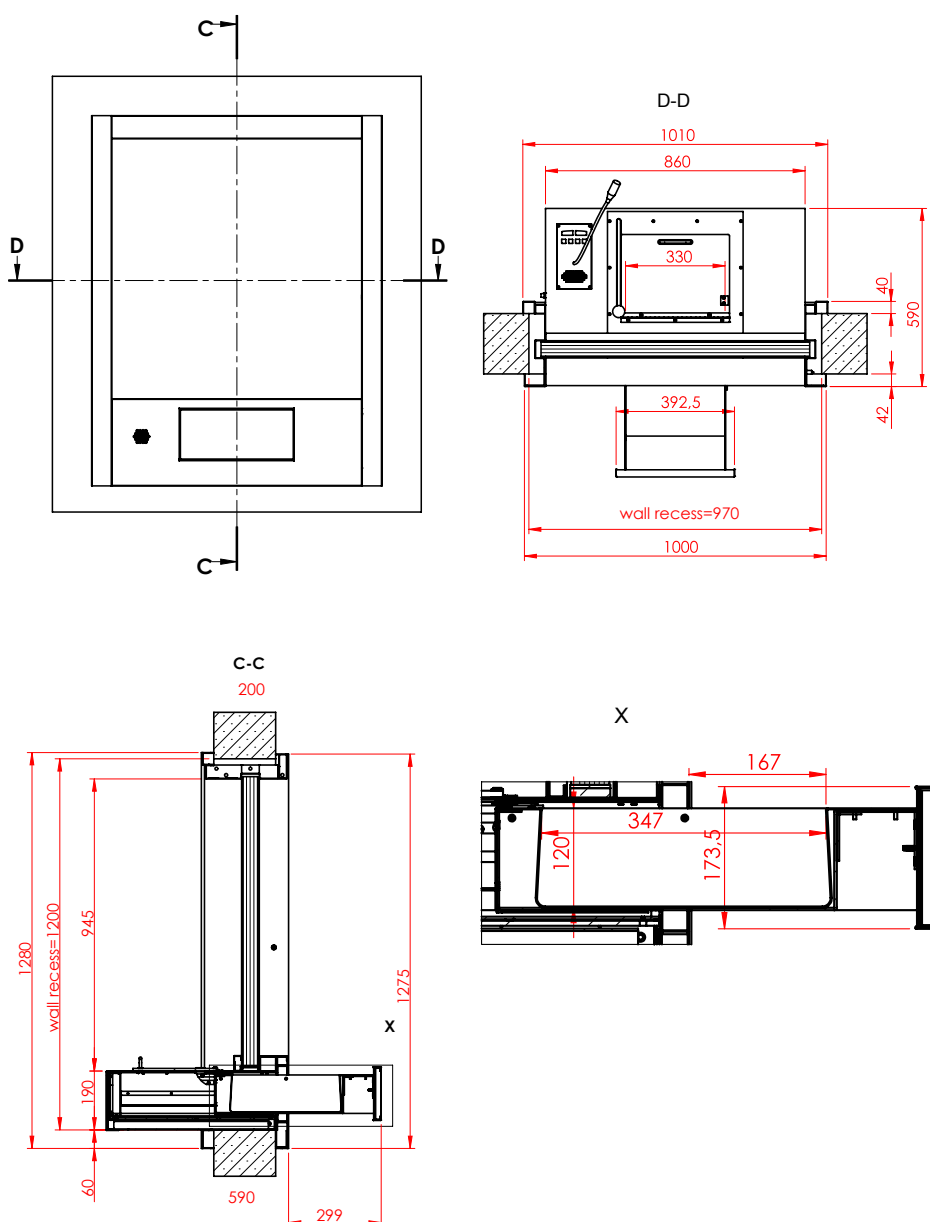

Walter Wurster GmbH

Heckenrosenstraße 38

D-70771 Leinfelden-Echterdingen

Telefon: +49 (0) 711 / 9 49 62-0

Telefax: +49 (0) 711 / 7 97 72 90

email: info@wurster.com

internet: www.wurster.com