Hatches for outdoor use

Model 51.01NF F90

Order Number 403019 FB4 F90
Order Number 403020 FB6 F90







Use

Model 51.01N F90 is a cash drawer for drive-in counters with an integrated intercom. It comes ready for installation and is suit-able for wall thicknesses up to 250 mm (optionally available for thicker walls). It is primarily intended for outdoor use by public authorities or as drive-in counter for pharmacies and petrol stations. It features bullet resistance class FB4 as standard (optionally FB6).

Safety and features

- Sliding pass-through with front panel and integrated intercom Public for automatic two-way conversation.
- Permits items up to 1112,5 mm high to be passed.
- The drawer is operated manually.
- Locks automatically when pulled back to fit flush with the front panel. The lock can only be released by the operator behind the counter by using the lever.
- It is not possible to reach through the extended pass-through or to manipulate the mechanism.
- The materials offer bullet resistance according to bullet resistance class FB4 or FB6 and fire resistance class F90.
- Model 51.01 NF F90 fulfils German UVV regulations.

Materials and use

- The pass-through consists of sheet steel.
- The interior is made of sheet steel with black-brown powder coating.
- The front panel is 90,5 mm thick in total.
- All steel parts produced using state-of-the-art precision laser cutting technology for ultimate quality.
- Model 51.01NF F90 is intended for indoor or roofed outdoor areas.
- The unit requires no maintenance. No need for cleaning or lubrication.

Hatches for outdoor use

Dimensions (all measurements in mm)

Front panel 800 x 375 x 90,5

Pass-through manual corresponding to wall recess

Width	608
Depth	701,5
Height	254
Extension	250,5

Pass-through

Width	340
Depth	330
Height	112,5

Weight

170 kg (FB4) 210 kg (FB6)


Miscellaneous


- Available as model 51 NF F90 without microphone/loudspeakers and two-way intercom.
- Coatings available in RAL colours on request.
- Installation in thicker walls possible.

Model 51.01 NF F90

Installation and dimensions

The unit comes ready for mounting in prepared walls/facade recesses. Coming from the outside, the unit is mounted by inserting it into the recess before screwing tight underneath the unit on the inside. The joints must be filled with fire protection material. Consideration must be given to access requirements and the possible need to remove the unit later in the unlikely event of repairs.

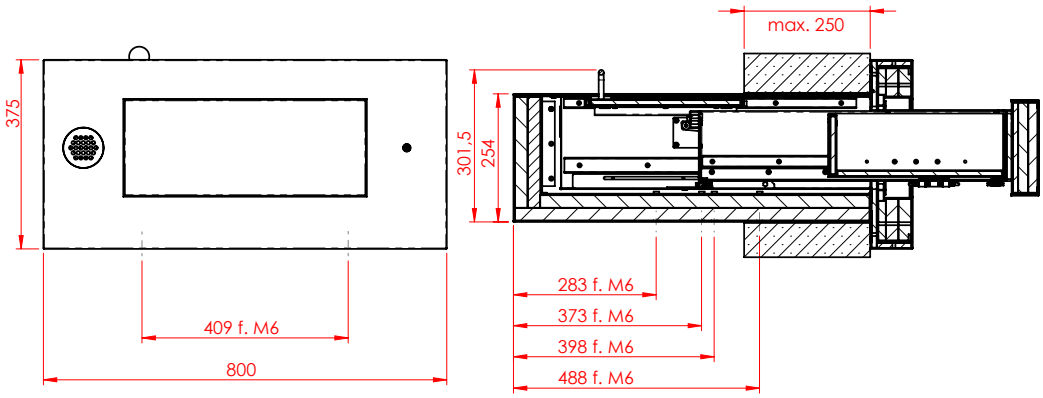

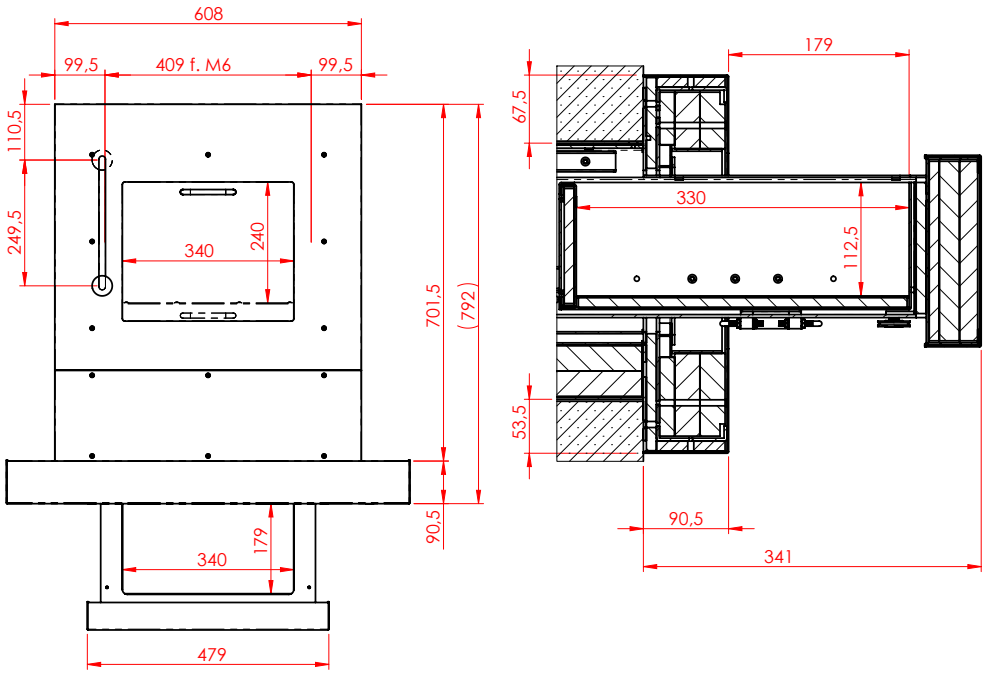

Walter Wurster GmbH
Heckenrosenstraße 38
D-70771 Leinfelden-Echterdingen
Phone: +49 (0) 711 / 9 49 62-0
Fax: +49 (0) 711 / 7 97 72 90
Email: info@wurster.com
Internet: www.wurster.com

wurster
Ideen in Blech