

Hatches for outdoor use

Model 51.01N

Order Number 403006 FB4

Order Number 403016 FB6

Order Number 403019 FB4 F90

Order Number 403020 FB6 F90



Use

Model 51.01N is a cash drawer for drive-in counters with an integrated intercom. It comes ready for installation and is suitable for wall thicknesses up to 200 mm (optionally available for thicker walls). It is primarily intended for outdoor use by public authorities or as drive-in counter for pharmacies and petrol stations. It features bullet resistance class FB4 as standard (optionally FB6).



Safety and features

- Sliding pass-through with front panel and integrated intercom Public for automatic two-way conversation.
- Permits items up to 100 mm high to be passed.
- The drawer is operated manually; electric operation available as option.
- Front cover opens automatically when sliding forward.
- Locks automatically when pulled back to fit flush with the front panel. The lock can only be released by the operator behind the counter by using the lever.
- It is not possible to reach through the extended pass-through or to manipulate the mechanism.
- The materials offer bullet resistance according to bullet resistance class FB4 or FB6. Also available for use by pedestrians with fire resistance class F90; FB4 and FB6 certificates issued by the competent authority are available.
- Model 51.01 N fulfils German UVV regulations.

Materials and use

- Front panel, carriage and cover are made of stainless steel.
- The interior is made of sheet steel with black-brown powder coating.
- The front panel is 47 mm thick in total.
- All steel parts produced using state-of-the-art precision laser cutting technology for ultimate quality.
- Model 51.01N is intended for roofed outdoor areas.
- The unit requires no maintenance. No need for cleaning or lubrication.

Hatches for outdoor use

Dimensions (all measurements in mm)

Front panel 760 x 260 x 47

Pass-through manual corresponding to wall recess

Width 500

Depth 653

Height 200

Extension 451

Pass-through

Width 340

Depth 248

Height 100

Weight

67 kg


Miscellaneous

- Model can be adapted for use by pedestrians with access from above and no fold-down panel.
- Electric motor also available with adjustable sliding clutch and automatic switch to manual operation in case power supply is interrupted.
- Available as model 51 without microphone/loudspeakers and two-way intercom.
- Coatings available in RAL colours on request.
- For use by pedestrians available in fire protection class F90.
- Installation in thicker walls possible.

Model 51.01N

Installation and dimensions

The unit comes ready for mounting in prepared walls/facade recesses. Coming from the outside, the unit is mounted by inserting it into the recess before screwing tight underneath the unit on the inside. Consideration must be given to access requirements and the possible need to remove the unit later in the unlikely event of repairs.

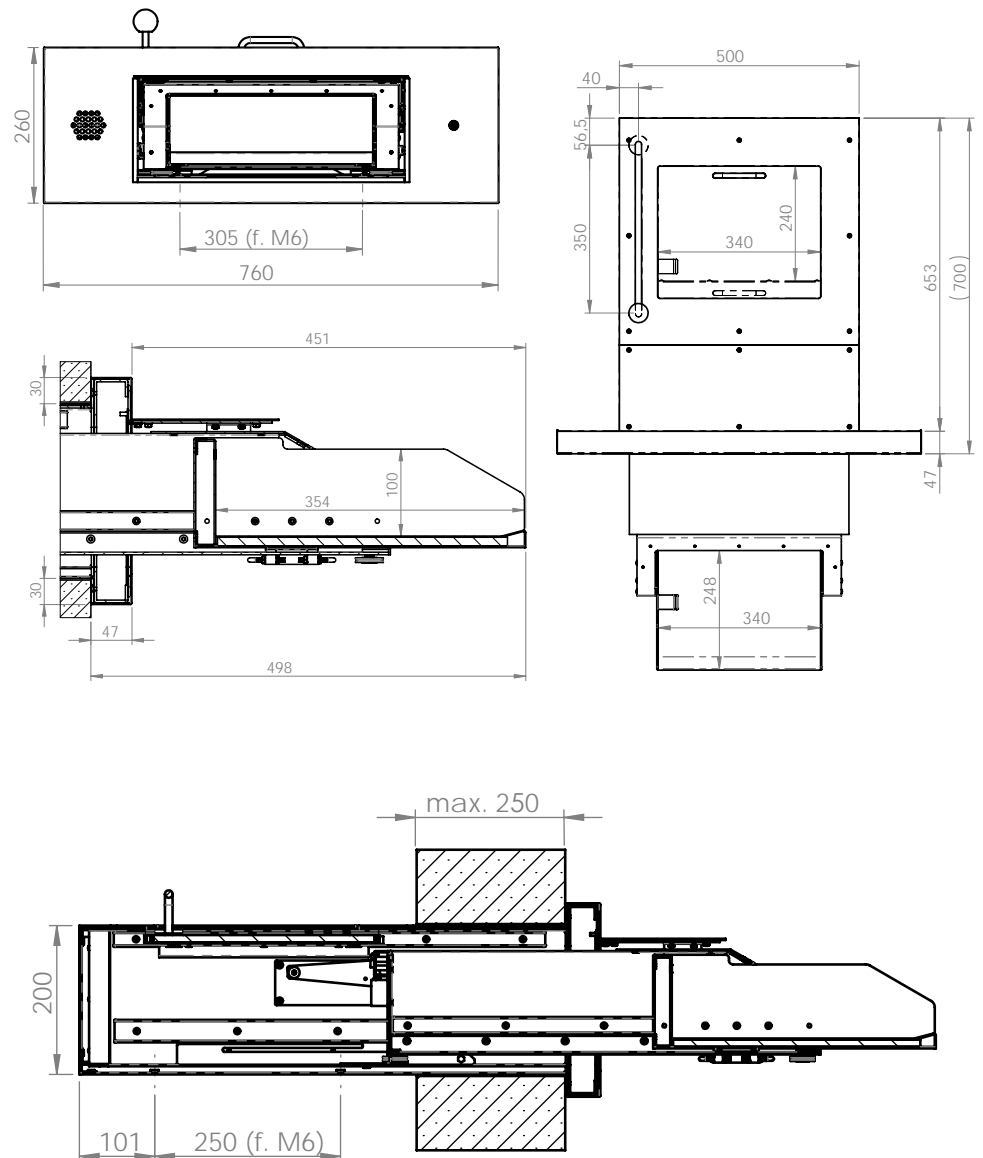

Walter Wurster GmbH

Heckenrosenstraße 38

D-70771 Leinfelden-Echterdingen

Phone: +49 (0) 711 / 9 49 62-0

Fax: +49 (0) 711 / 7 97 72 90

Email: info@wurster.com

Internet: www.wurster.com